

NEW COLORS AND SURFACES FOR YOUR INSPIRATION



THE NORWEGIAN
ASTHMA AND ALLERGY
ASSOCIATION
— making people healthier

member of

BYGGMA
group



PRODUCT FACT

- Huntonit pre-painted wall and ceiling panels are produced in Norway with nothing but pure natural wood fibers. The fibers are compressed and fused together in a heat and wather prosess with no additive substance
- The panels are treated with five coats of environmentally friendly watherbased acrylic paint. Finishing layer is a protective coating
- The panel has fire- (D-s2,d0) and sound-absorbing effect (sound diminishing cladding). Technically approved by SINTEF and may be used in REI30- and REI60- structures
- The panels are dense, making it possible to install screw fixed bookshelves and lamps directly on to the panels
- Recommended by the Norwegian Asthma and Allergy Association (NAAF)
- Holds the Indoor Climate Label

Wood Single panel Skygge installed on wall and Mist in the ceiling



BRUSH PAINTED

SINGLE PANEL BOARD

Single panel board with brush painted surface and wood structure. May be used horysontally or vertically onto ceiling or the wall. Short side extension with V-fas provide a clean appearance where panels need to be spliced, maximum coverage beyond 2400mm.



LONG SIDE EXTENSION
IN SKYGGE PROFILE



SHORT SIDE EXTENSION
IN SKYGGE PROFILE

Huntonit Panel board White - brush painted	(net size:11x180x2400)	11 x 200 x 2420 mm
Huntonit Panel board White - brush painted	(net size:11x125x2400)	11 x 142 x 2420 mm

Huntonit Wood Panel board White	(net size:11x180x2400)	11 x 200 x 2420 mm
Huntonit Wood Panel board Sand	(net size:11x180x2400)	11 x 200 x 2420 mm
Huntonit Wood Panel board Mist	(net size:11x180x2400)	11 x 200 x 2420 mm




PAINTED CEILING PANEL

LONG AND SHORT SIDE
EXTENSION IN V-FAS PROFILE



Brilliant White, brush painted	11 x 300 x 1220 mm
Brilliant White, brush painted	11 x 620 x 1220 mm
Classique painted	11 x 300 x 1220 mm
Classique painted	11 x 300 x 1820 mm
Classique painted	11 x 620 x 1220 mm
Symfoni painted	11 x 300 x 1220 mm
Symfoni painted	11 x 300 x 1820 mm
Plankett painted	11 x 300 x 1220 mm
Plankett painted	11 x 300 x 1820 mm

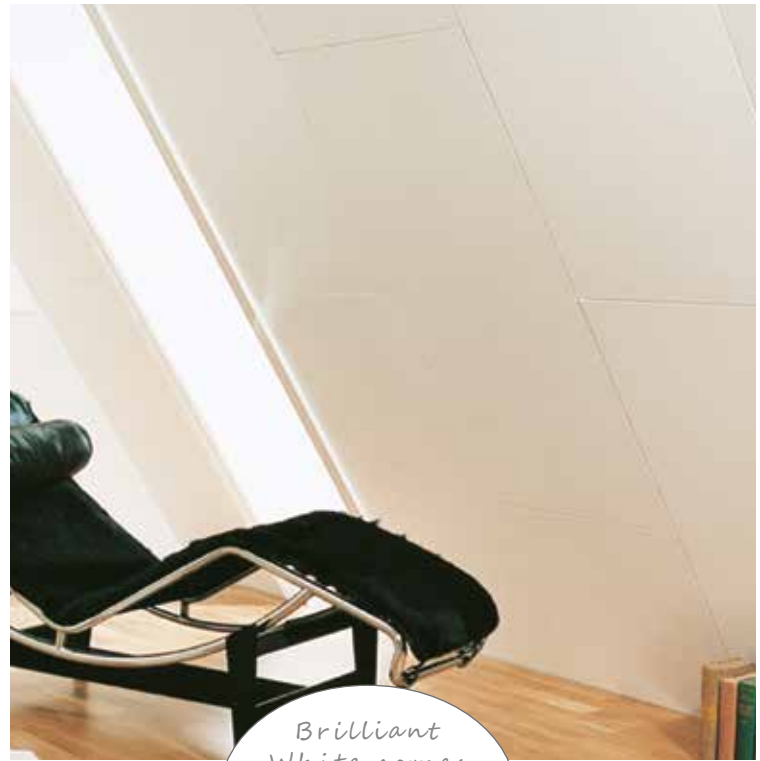

*Brilliant
White comes
with a smooth
brush painted
surface*

Symfoni ceiling and Perle wall

Classique ceiling



Brilliant ceiling



NCS CODES:


Brilliant White
NCS S 0500-N

White
NCS S 0502-Y


PRE PAINTED CEILING PANEL INSTALLATION

Before installation: check the panel for any damage or difference in color.

Huntonit is a natural product made of wood fiber pulp; variation in color and appearance may occur. It is recommended to use panel from the same production or batch number.

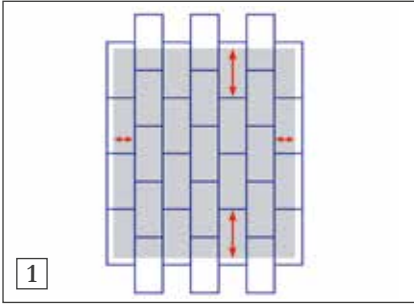

1) Acclimatize the panel at room temperature, for 2 days, and install immediately after the package is opened. A drawing is made prior to installation for calculating the consumption of roof panel.

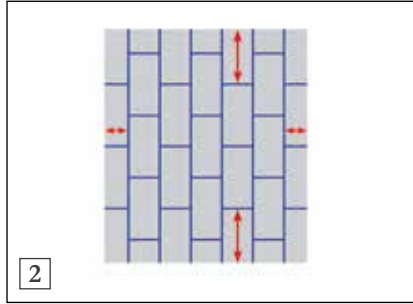


2) The principle of the drawing is to show the best solution of the pattern in the ceiling and how the panel must be adapted before mounting. Keep the distance to walls and fixed points at 7-10 mm.



3) Mount across electric beams/beams with a max distance c/c 60 cm. All panel edges without adjacent panel must be supported. When installing narrower ceiling panels, the beam distance must be adjusted to fit the width of the panel.



4) Cut to the first panel according to the drawing. When cutting with circular saw, the painted side should face down.

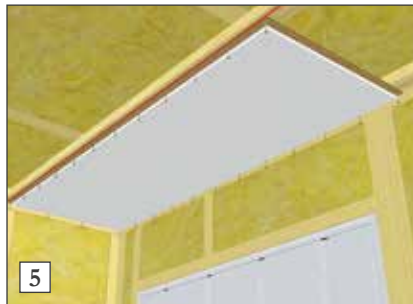

5) Mount the first row after string / chalk cord for a straight start. Distance to wall and between nails; c/c 150 mm. NB: mount with approximately 10 mm distance to all walls.




6) To avoid damage to the panel, use nail setter when using nails. Cramps and screws may also be used.



7) The panel is to be spliced at the beam and should not be glued. Distance between nails; c/c 150 mm. Avoid damage to the panel, use a nail setter when using nails. Cramps and screws may also be used. (see mont. M005-08-04).



8) To find the length of the 1st panel in the second row, subtract 60 cm from the length of the 1st panel in the 1st row.

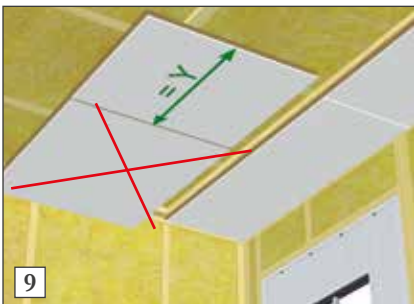

9) Measure and mark the 1st panel in the 2nd row. The excess part is cut off. When cutting with circular saw, the painted side should face down.



10) Mount the rest of the panel. Tadaa - your new ceiling is done!



11) You may mount recessed down lights in all our ceiling panels. You can also install our panels in wet rooms, provided normal ceiling height and good ventilation is available. (For down-lights, see NBI 543.615).

HUNTONIT

Producer:

Huntonit AS
Pb 21, 4701 Vennesla
NORWAY

Tel: +47 38 13 71 00
Fax: +47 38 13 71 01
E-mail: byggma@byggma.no
www.byggmagroup.com
www.huntonit.com



RET Bouwproducten is the official importer of Huntonit for the Netherlands.

www.retbouwproducten.nl