

SAHARA

Option: SAHARA Unperforated

Inspiring Great Spaces™

Armstrong®
CEILING SOLUTIONS

SAHARA



SAHARA	BOARD	TEGULAR	MICROLOOK	MICROLOOK BE	VECTOR
	Prelude 24 - XL ² /TLX Prelude 24 Sixty ² - XL ² /TLX	Prelude 24 - XL ² /TLX Prelude 24 Sixty ² - XL ² /TLX	Prelude 15 - XL ² /TL Interlude HRC - XL ²	Prelude 15 - XL ² /TL Silhouette 6mm - XL ² Interlude HRC - XL ²	Prelude 24 - XL ² Prelude 24 Sixty ² - XL ²
SAHARA Perforated					
600 x 600 x 15 mm	2516 M	2518 M	2519 M	2524 M	
625 x 625 x 15 mm	2516 D	2518 D	2519 D		
600 x 600 x 19 mm					3322 M
675 x 675 x 15 mm	2520 M	2521 M		2690 M	
1200 x 600 x 15 mm	2517 M	2522 M	2731 M		
1250 x 625 x 15 mm	2517 D				
1200 x 300 x 15 mm			2730 M		
SAHARA Unperforated					
600 x 600 x 15 mm	2610 M	2612 M	2613 M		
625 x 625 x 15 mm	2610 D				




COLORTONE DUNE: Carrara (CA), Platinum (PN), Blue Mountain (BT).



EN ISO 354 & EN ISO 11654

α_w	NRC	125	250	500	1000	2000	4000	Hz	
SAHARA (Board, Tegular, MicroLook, MicroLook BE)	0.60	0.55	0.45	0.40	0.55	0.65	0.65	0.60	α_p
SAHARA Vector	0.65	0.65	0.45	0.50	0.60	0.70	0.70	0.55	α_p
SAHARA Unperforated (Board, Tegular, MicroLook)	0.10(L)	0.15	0.30	0.20	0.10	0.10	0.10	0.20	α_p

Class C (perforated)
not classified (unperforated)

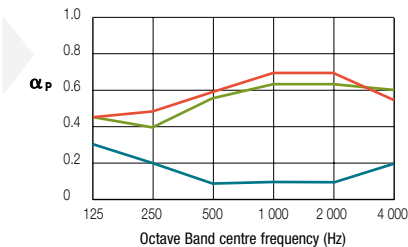

EN ISO 10848-2 & EN ISO 717-1

D_{ntw}
35 dB (SAHARA Vector)
34 dB (SAHARA and SAHARA Unperforated)



EN ISO 140-3 & EN ISO 717-1

R_w
17 dB (perforated 15mm)



EEA	Euroclass
EN 13501-1	A2-s1, d0

RUS	KM1 (G1, V1, D1, T1)
FZ 123	



EN 12667 & ISO 8301

λ
0.060 W/m K



95 % RH



LIFETIME guarantee
30 YEAR system guarantee



≈ 3.9 kg/m²

* SAHARA = 40%, SAHARA Vector = 48%. **SAHARA = 84%, SAHARA Unperforated = 85%.

Please contact our Armstrong Technical Sales Group for further details.

www.armstrongceilings.eu

Armstrong
CEILING SOLUTIONS