


BAUER

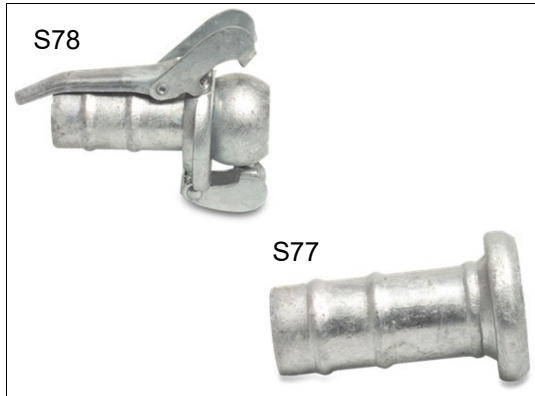

O-RING - SBR Zwart / SBR Black

E = EPDM

Maat / Size Partno.:

50mm	IBAU(E)050
76mm	IBAU(E)070
89mm	IBAU(E)089
108mm	IBAU(E)108
133mm	IBAU(E)133
159mm	IBAU(E)159
194mm	IBAU(E)194



Ook mogelijk in het Bauer assortiment; Lasstukken, Bochten 45°C en 90°C, Doppen, Kappen, Verlopen, Flensaansluiting, Draadeinden, T-stukken en Buizen.

Also available in the Bauer assortiment; Welding parts, Bend 45°C and 90°C, Plug, Caps, Reducers, Flange, Thread ends, T-pieces and Pipes.



KOPPELINGEN

Materiaal: koudgewalst SM-staal, in- en uitwendig thermisch verzinkt
Werkdruk: 20 bar voor diameter t/m 89 mm
12 bar voor diameter t/m 216 mm

Material: SM steel, both side themically galvanised
Working pressure: 20 bar untill diametre 89 mm
12 bar from 108 mm till 194 mm

TYPE S78 - Vrouwelijk deel

Verzinkt stalen slangpilaar, beker en SBR afdichtingsring.

TYPE S78 - Female part

Galvanised steel hosepillar, cup and SBR gasket

TYPE S77 - MANNELIJK

Verzinkt stalen met slangpilaar, Conus met hendel

TYPE S77 - MALE

Galvanised steel hosepillar, Conus with levers

Beker / Cup	Maat / Size:	Partno. S78	Partno. S77
50	50	IBAUV050	IBAUM050050
76	63	IBAUV07663	IBAUM076063
76	76	IBAUV07676	IBAUM076075
89	75	IBAUV089075	IBAUM089075
89	89	IBAUV089089	IBAUM089089
108	102	IBAUV100	IBAUM100
108	110	IBAUV108110	IBAUM108110
133	125	IBAUV125	IBAUM125
159	150	IBAUV150	IBAUM150