


EVA INDUSTRIAL

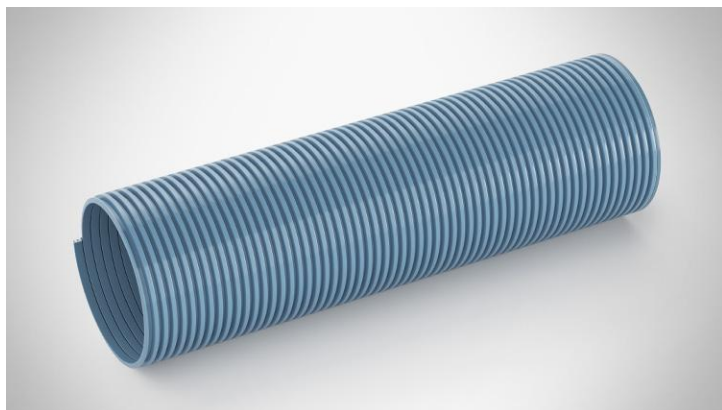

Hose made of spiral EVA, unreinforced, for extraction of air, dust, welding fumes and gases.

Details

Smooth surface

Flexibility

Abrasion Resistance

Temperature range

Chemical Resistance

Crushing Resistance

-30 °C 60 °C

EVA Table

Ø nominal mm	Ø nominal inch	Ø i.d. mm	Ø o.d. mm	vacuum 23 °C m/H ₂ O	bending radius mm	total thickness mm	spiral pitch mm	spiral direction	weight meter g/m	coil length m	Part no.
25	1	25	32.5	5	66	4	4.6	left	200	30	CSTOEVA025
29		29	36	5	76	3.5	4.3	left	210	30	CSTOEVA029
32	1 1/4	32	40.4	5	82	4.5	4.7	left	280	30	CSTOEVA032
38	1 1/2	38	48	5	93	5	5.3	left	380	30	CSTOEVA038
45	1 3/4	45	55	5	110	5	5.5	left	450	30	CSTOEVA045*
50	2	50	61	5	122	5.5	5.7	left	550	30	CSTOEVA050

Ø nominal mm	Ø nominal inch	Ø i.d. mm	Ø o.d. mm	vacuum 23 °C m/H ₂ O	bending radius mm	total thickness mm	spiral pitch mm	spiral direction	weight meter g/m	coil length m	Part no.
60		60	72	4	146	6	5.7	left	700	30	CSTOEVA060
75		75	88.5	4	155	6.5	6.5	left	920	15	CSTOEVA075*
80		80	93	4	170	7	6.5	left	980	15	CSTOEVA080*

* On demand

All technical specifications apply to a temperature of 23° C ± 2° C (ISO 291)

All technical specifications contained herein are provided for reference purposes only.

For further details regarding our products' specifications, please refer to the relevant products' data sheets or contact your sales representative.