


SUPERFLEX CALOR

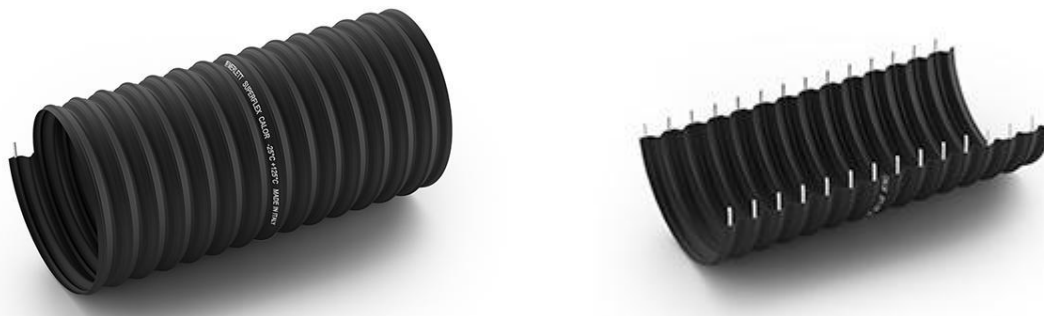

Rubber hose with galvanised steel spiral, for suction and transport of air and acid vapours.

	SMOOTH SURFACE	***
	FLEXIBILITY	*****
	ABRASION RESISTANCE	**
	CRUSHING RESISTANCE	***
	TEMPERATURE RANGE	-25°C +125°C

All technical specifications apply to a temperature of 23° C ± 2° C (ISO 291)

All technical specifications contained herein are provided for reference purposes only.

For further details regarding our products' specifications, please refer to the relevant products' data sheets or contact your sales representative.

Ø I.D.	Ø I.D.	Ø O.D.	WALL THICKNESS	WEIGHT METER	BENDING RADIUS	VACUUM 23°C	SPIRAL PITCH	SPIRAL DIRECTION	Ø STEEL WIRE	COIL LENGTH
inch	mm	mm	mm	g/m	mm	m h2o	mm		mm	m
1	25	30	0.7	120	25	3.5	8	Links	0.8	30
	30	35	0.7	140	30	3.5	8	Links	0.8	30
1 1/4	32	37	0.7	145	32	3.5	8	Links	0.8	30
	35	40	0.7	160	35	3.5	8	Links	0.8	30
1 1/2	38	44	0.7	180	38	3	10	Links	1	30
	40	46	0.7	200	40	3	10	Links	1	30
1 3/4	45	51	0.7	230	45	3	10	Links	1	30
2	50	56	0.7	280	50	2.5	12	Links	1.2	30
	60	66	0.7	320	60	2.5	12	Links	1.2	30
2 1/2	63	69	0.7	340	63	2.5	12	Links	1.2	30
	65	71	0.7	360	65	2.5	12	Links	1.2	30
	70	77	0.7	420	70	2	14	Links	1.4	30
	75	82	0.7	440	75	2	14	Links	1.4	30
	80	87	0.7	480	80	1.7	14	Links	1.4	30
	85	92	0.7	520	85	1.7	14	Links	1.4	30
3 1/2	90	97	0.7	520	90	1.7	14	Links	1.4	30
	100	107	0.7	660	100	1.4	16	Links	1.6	30
	110	117	0.7	720	110	1.4	16	Links	1.6	30
	120	127	0.7	780	120	1.2	16	Links	1.6	30
	125	132	0.7	800	125	1.2	16	Links	1.6	30
	130	137	0.7	840	130	1	16	Links	1.6	30
	140	147	0.7	900	140	1	16	Links	1.6	30
	150	157	0.7	1100	150	0.7	18	Links	1.8	30
	160	167	0.7	1160	160	0.7	18	Links	1.8	30
	170	177	0.7	1240	170	0.5	18	Links	1.8	30
	180	187	0.7	1300	180	0.5	18	Links	1.8	30
	200	207	0.7	1440	200	0.4	18	Links	1.8	30
	220	227	0.7	1600	220	0.4	18	Links	1.8	15
	250	259	0.8	1850	250	0.3	22	Links	2	15
	300	309	0.8	2300	300	0.2	22	Links	2	15

