Termoflex 300°C

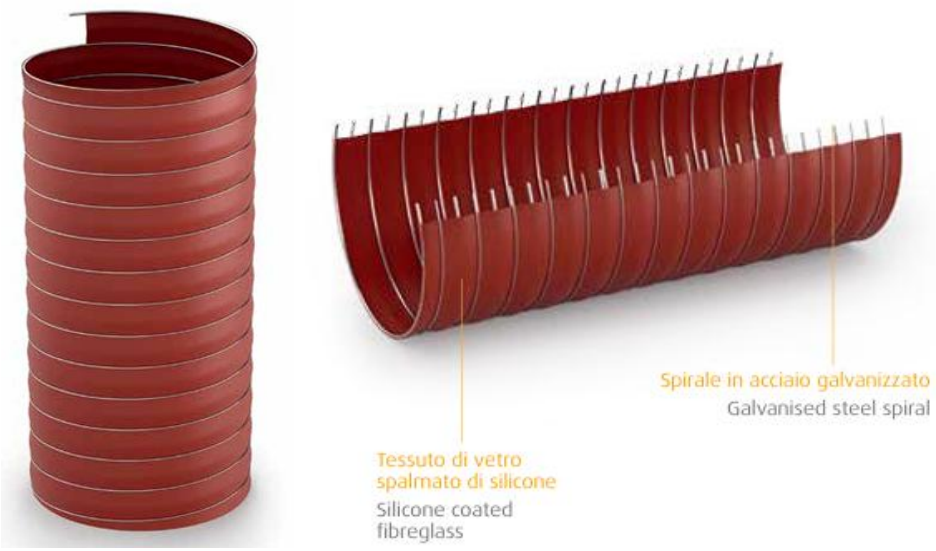

Hose made of silicone coated fibreglass with galvanised steel spiral, for suction of fumes and hot air.

SUPERFICI LISCE SMOOTH SURFACE	✸ ✸ ✸
FLESSIBILITÁ FLEXIBILITY	✸ ✸ ✸ ✸
RESISTENZA ALL'ABRASIONE ABRASION RESISTANCE	✸ ✸ ✸ ✸
TEMPERATURA D'IMPIEGO TEMPERATURE RANGE	-85°C +300°C
RESISTENZA CHIMICA CHEMICAL RESISTANCE	SILICONE
RESISTENZA ALLO SCHIACCIAMENTO CRUSHING RESISTANCE	✸ ✸ ✸

eteha
HOSE SPECIALIST

De flexibele oplossing

Termoflex 300°C

Ø I.D.	Ø O.D.	WEIGTH	BENDINGRADIUS	WORKINGPRESSURE 1:3 23°C	BURSTINGPRESSURE 23°C	VACUUM 23°C	COIL LENGTH	PART NO.
mm	mm	g/m	mm	bar	bar	m h2o	m	
51	55	250	26	1.2	3.6	5	4	CAFTE300051
63	67	300	32	1.1	3.3	5	4	CAFTE300063
70	74	395	35	1.1	3.3	5	4	CAFTE300070
76	80	410	38	1	3	3.97	4	CAFTE300076
83	87	470	42	1	3	3.97	4	CAFTE300083
89	93	495	45	0.9	2.7	3.85	4	CAFTE300089
102	106	570	51	0.9	2.7	3	4	CAFTE300102
114	119	730	57	0.8	2.4	2.2	4	CAFTE300114
121	126	760	61	0.8	2.4	2	4	CAFTE300127
127	132	805	64	0.8	2.4	1.7	4	CAFTE300127
140	145	885	70	0.8	2.4	1.5	4	CAFTE300140
152	157	1050	76	0.6	1.8	1.4	4	CAFTE300152
178	183	1210	89	0.6	1.8	1.1	4	CAFTE300178
203	208	1380	102	0.5	1.5	0.7	4	CAFTE300203
254	259	1650	127	0.4	1.2	0.45	4	CAFTE300254
305	310	2000	153	0.1	0.3	0.3	4	CAFTE300305

All technical specifications contained here in are provided for reference purpose only. For further details regarding our products' specifications, please refer to the relevant products' data sheets or contact your sales representative.

Eteha bv – Slangtechniek
Papendrecht - Netherlands
tel. +31 - (0)88 – 66 55 800
Monday to Friday 8:00 – 17:00hr
website : www.eteha.nl
email : sales@eteha.nl