

Hose reel MGL

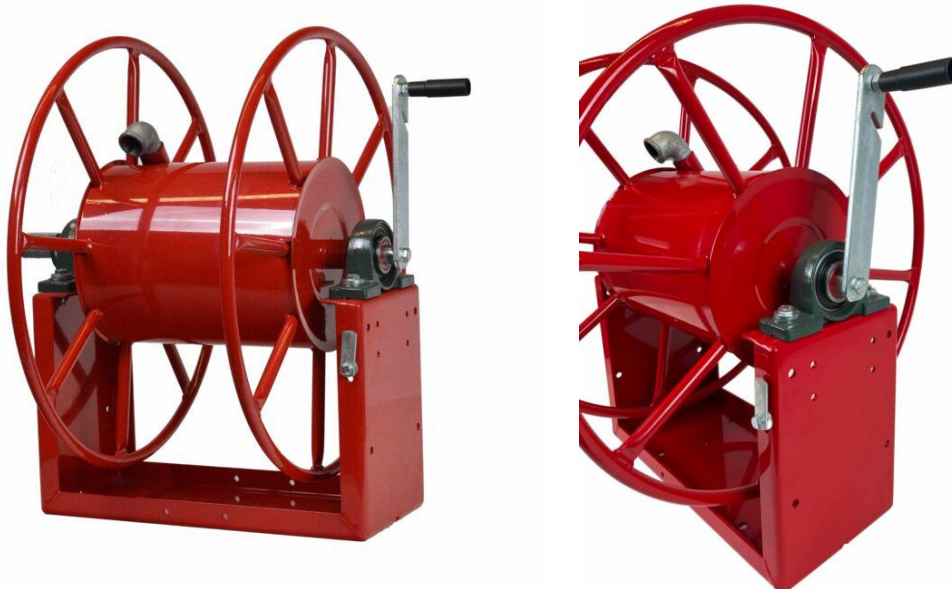

Description

The MGL manual hose reel is the ideal solution for professional applications in gardening and landscaping, industry, trade and workshops where hose capacities of up to 200 metres are required.

Main features:

- manual operation with lockable crank handle to prevent uncontrolled unwinding, e.g. during transport
- robust casing made of painted steel for a long service life, even under demanding conditions
- ball-bearing axle for smooth winding
- sturdy mounting bracket for secure fastening of the hose reel in the intended working area
- supplied without hose - suitable hoses are available as accessories

Optional accessories:

- hose reel guide with handle to optimally guide the hose during reeling in and prevent tangling. The handle ensures easy handling and enables precise control during the winding process.

Technical data

- | | |
|-------------------|--|
| • Medium | : Cold water, Hot water, Compressed air, Diesel, Oil |
| • Casing | : Painted steel |
| • Drive system | : Manual |
| • Length/Capacity | : without hose |


HS-Code: 84798997

EAN / GTIN: 4260554751544


Country of origin: IT

Item-No.	Type	Medium	Max.length of the hose	Max.Ø	Pressure Max.	Temp. Max.	Swivel
H2940010	MGL200	Cold/hot water Compressed air Diesel, oil galvanised steel swivel joint 250bar / 90°C	50m 100m 130m	25mm 15mm 13mm	250bar	90°C	brass
H2940040	MGL500	Cold/hot water Compressed air Diesel, oil galvanised steel swivel joint 250bar / 90°C	100m 200m 270m	25mm 15mm 13mm	250bar	90°C	brass
H2940050	MGL600	Cold/hot water Compressed air Diesel, oil galvanised steel swivel joint 250bar / 90°C	40m	38mm	200bar	60°C	brass
H2940060	MGL700	Cold/hot water Compressed air Diesel, oil Galvanised steel swivel joint 20bar / 60°C	30m	50mm	20bar	60°C	brass
H2940070	MGL800	Cold/hot water Compressed air Diesel, oil galvanised steel swivel joint 20bar / 60°C	25m	50mm	20bar	60°C	brass
H2940080	MGL900	Cold/hot water Compressed air Diesel, oil Galvanised steel swivel joint 60bar / 60°C	20m	38mm	200bar	60°C	brass
H2940095	MGL1100	Cold/hot water Compressed air Diesel, oil galvanised steel swivel joint 20bar / 60°C	18m	50mm	20bar	60°C	brass




	A	B	Kg
H2940010 MGL200	670	675	31
H2940080 MGL900	685	690	36

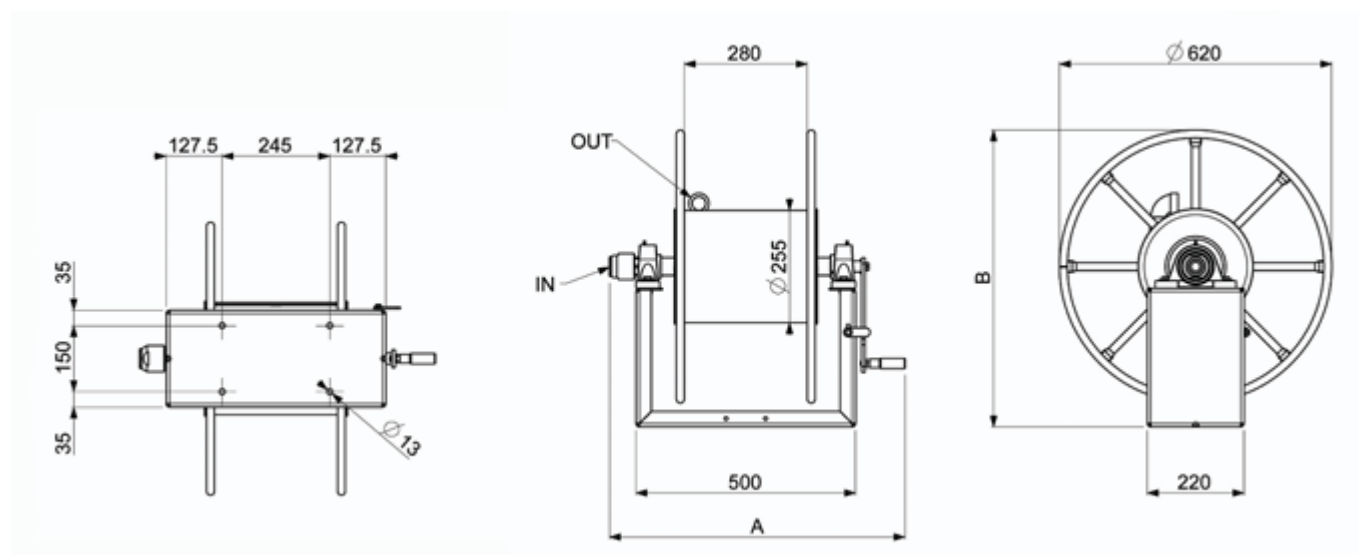




	A	B	Kg
H2940040 MGL500	775	805	39
H2940050 MGL600	785	820	43

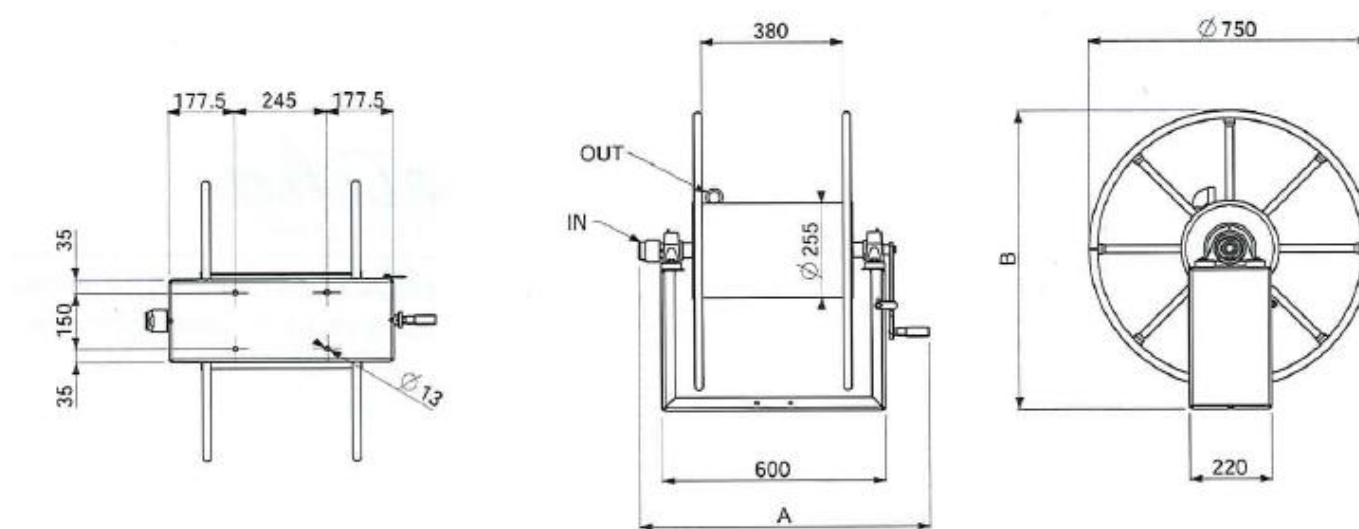

	A	B	C	Kg
H2940060 MGL700	600	425	740	36
H2940070 MGL800	500	325	640	34

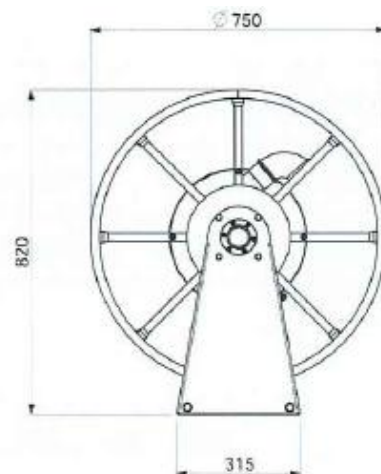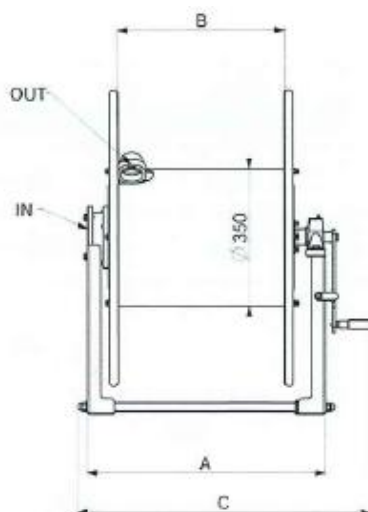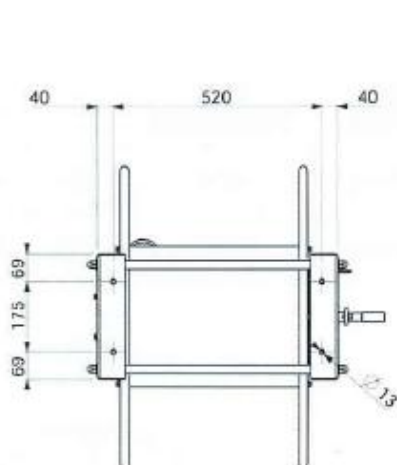

	A	B	C	Kg
H294095 MGL100	600	425	740	34

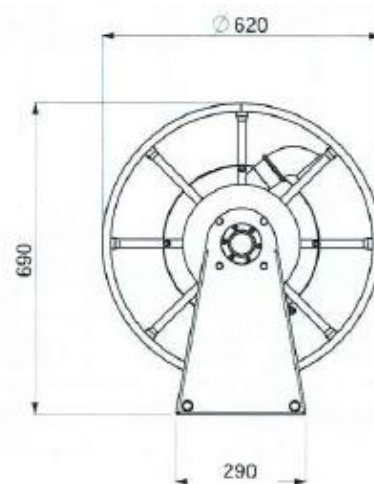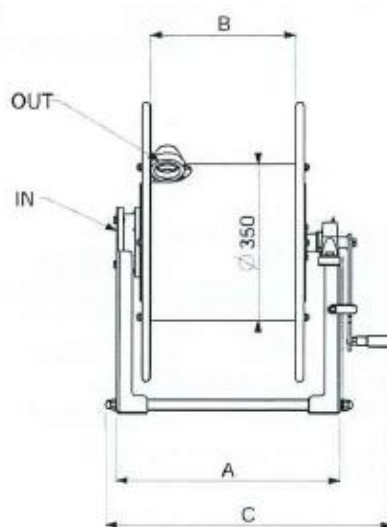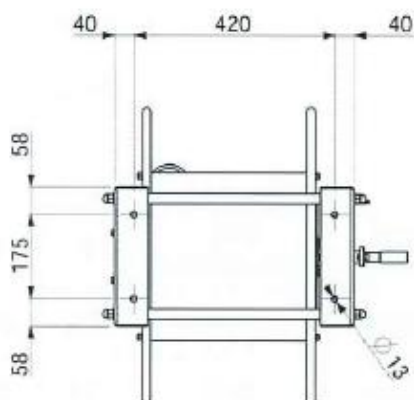

Optional accessories

Part no.	Designation
ES130009	Roller hose guide outlet with handle for MGL500
ES130019	Roller hose guide outlet with handle for MGL200
ES130028	Roller hose guide outlet with handle for MGL600
ES130034	Roller hose guide outlet with handle for MGL900
ES130010	Hose trolley SW10 for MGL