




# Panels

## Panel Assembly Standard Horizontal

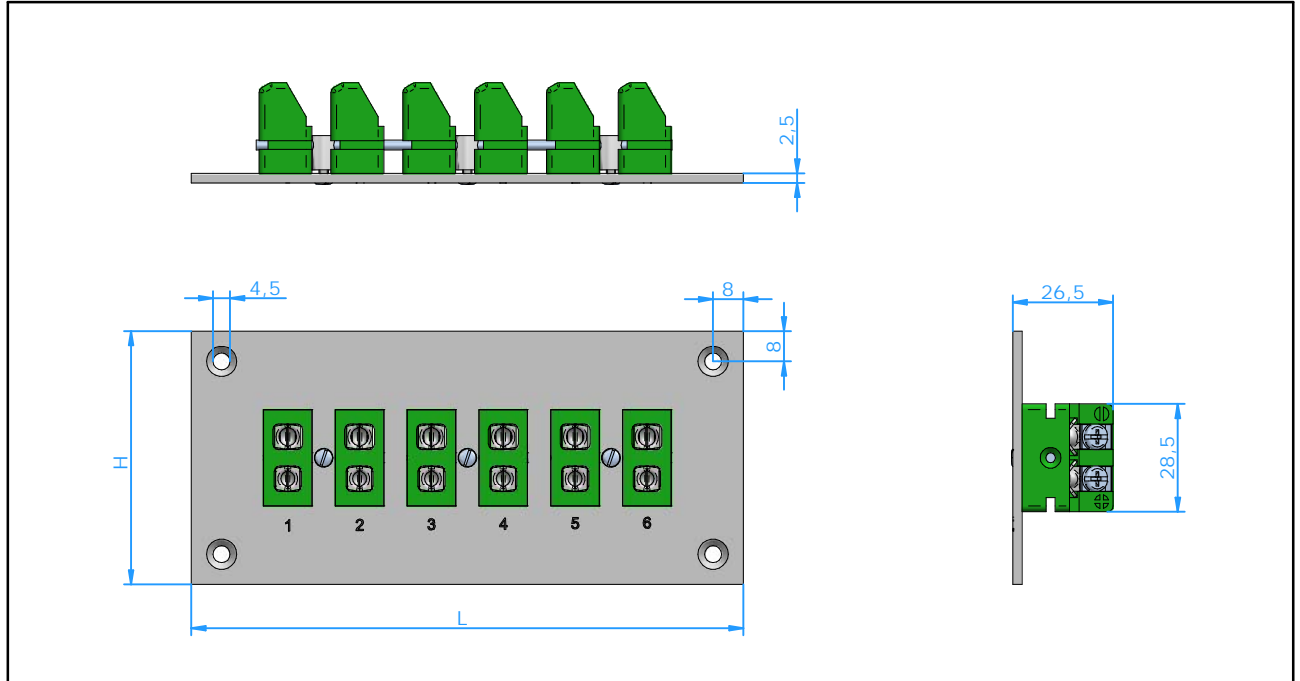

### Application

Panel assembly for thermocouple and RTD circuits for mounting in control rooms, test stands, laboratory applications, pilot plants, etc.

### Wire size

- Accepts wires upto 1,6 mm.

### Temperature rating

- 220 °C Maximum

### Construction

This panel consists of the panel set 20.059-x fitted with the standard panel inserts PSI-... For further details see separate specification sheets.

### Ordering Code PAS-x-yz

x = number of circuits                    1, 2, 3, 4, 5, 6, 8, 12, 18, 24  
 y = calibration                            E, J, K, N, T, U, R/S, C, B  
 z = color code standard                I = IEC, A = ANSI, D = DIN, J = JIS

Circuits	Rows	Panel dimension (L x H in mm)	Dimension panel cut-out (in mm)
1	1	38 x 38	31 Ø
2	1	70 x 67	40 x 40
3	1	89 x 67	59 x 40
4	1	108 x 67	78 x 40
5	1	127 x 67	97 x 40
6	1	146 x 67	116 x 40
8	1	184 x 67	154 x 40
10	1	222 x 67	192 x 40
12	1	260 x 67	230 x 40
16	2	184 x 115	154 x 88
18	1	374 x 67	344 x 40
24	2	260 x 115	230 x 88