


## MI SERIES BARE COPPER HEATING CABLE

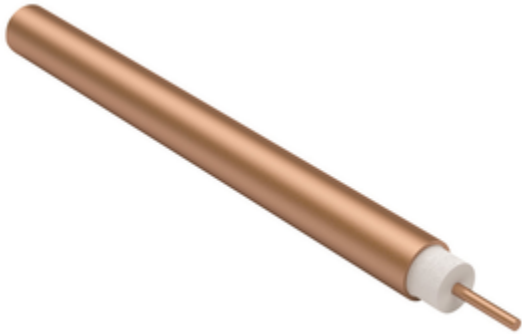

nVent RAYCHEM mineral insulated (MI) series resistance trace heating cables are used for low temperature maintenance applications such as long pipeline heating, condensation prevention and ramp heating. Copper sheath with continuous exposure temperatures to 392 °F/200 °C and typical power outputs to 20 W/ft (65 W/m). Approved for use in hazardous areas.

### FEATURES & BENEFITS

Reduced total installed cost

Reduced power supply costs: lower start up currents compared with other technologies

Simple controls: current monitoring on series resistance provides instant visibility on critical circuits

Fast track/expedited service not available for configured heating units

### SPECIFICATIONS

**Supply Voltage** 0 – 500 V

**Max Power Output** 65 W/m

**Max Continuous Exposure Temperature, Power Off** 200 °C

**Insulation Material** Magnesium Oxide

**Sheath Material** Copper

**Area Classification** Non-Hazardous; Hazardous

**Min Installation Temperature** -60 °C

**Min Cable Spacing** 25 mm

Table 1/1

Catalog Number	Nominal Resistance @ 20°C	Outer Diameter
----------------	---------------------------	----------------

HCC1M1.08	1.08 Ω/km	8.3 mm
HCC1M2.87	2.87 Ω/km	6.4 mm
HCC1M1.72	1.72 Ω/km	7.3 mm
HCH1M100	100 Ω/km	5.2 mm
HCC1M11	11 Ω/km	4.9 mm
HCH1M140	140 Ω/km	4.9 mm
HCC1M17	17 Ω/km	4.6 mm
HCH1M220	220 Ω/km	4.5 mm
HCC1M25	25 Ω/km	3.7 mm
HCH1M315	315 Ω/km	4.3 mm
HCC1M4	4 Ω/km	5.9 mm
HCC1M40	40 Ω/km	3.4 mm
HCH1M450	450 Ω/km	4 mm
HCC1M63	63 Ω/km	3.2 mm
HCH1M630	630 Ω/km	4 mm
HCC1M7	7 Ω/km	5.3 mm
HCH1M800	800 Ω/km	3.5 mm
HCC1M88	88 Ω/km	3 mm

**Supply Voltage** 0 – 300 V

**Max Power Output** 65 W/m

**Max Continuous Exposure Temperature, Power Off** 200 °C

**Insulation Material** Magnesium Oxide

**Sheath Material** Copper

**Area Classification** Non-Hazardous; Hazardous

**Min Installation Temperature** -60 °C

**Min Cable Spacing** 25 mm

Table 1/1

Catalog Number	Nominal Resistance @ 20°C	Outer Diameter
HCH1L1250	1250 Ω/km	2.8 mm
HCH1L2000	2000 Ω/km	2.8 mm

Max Power Output: Depending on application, max power outputs up to 40W/ft are permitted.

**North America**

Tel +1.800.545.6258  
Fax +1.800.527.5703  
thermal.info@nvent.com

**Europe, Middle East, Africa**

Tel +32.16.213.511  
Fax +32.16.213.604  
thermal.info@nvent.com

**Asia Pacific**

Tel +86.21.2412.1688  
Fax +86.21.5426.3167  
cn.thermal.info@nvent.com

**Latin America**

Tel +1.713.868.4800  
Fax +1.713.868.2333  
thermal.info@nvent.com



Our powerful portfolio of brands:  
**nVent.com CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER**

© 2021 nVent. All nVent marks and logos are owned or licensed by nVent Services GmbH or its affiliates. All other trademarks are the property of their respective owners.  
nVent reserves the right to change specifications without notice.