




SERIES SETB (U 200 to U 1450)

According to VDE 0570 / EN 61558 part 2 – 2/4 

- Shell-type transformer/ EI configuration
- Performance range 320 – 2500 VA
- Frequency 50/60 Hz
- Insulation class T 40/B
- Protective system IP 00, mounting suitability to IP 20, class I construction
- Separate windings, primary 2 tapping $\pm 5\%$
- Vacuum-impregnated
- Transformer terminals
- Footplate for mounting
- Contact protection to VBG 4



SERIES SETB (U 200 to U 1450)

According to VDE 0570 / EN 61558 part 2 – 2 / 4 


- Shell-type transformer/EI configuration
- Performance range 320 – 2500 VA
- Frequency 50/60 Hz
- Insulation class T 40/B
- Protective system IP 00, mounting suitability to IP 20, class I construction
- Separate windings, primary 2 tapping $\pm 5\%$
- Vacuum-impregnated
- Transformer terminals
- Footplate for mounting
- Contact protection to VBG 4
- Standard bolt-on dimensions to DIN 41308
- Duty cycle 100 %



Technical data						
Nominal power	Series	Short surge power DKB $\cos \varphi 0.5$	Non-load loss	Voltage drop	Efficiency	Weight
[VA]	U	[kVA]	approx. [W]	approx. [%]	approx. [%]	approx. [kg]
320	200	0.76	14	7.0	89	4.2
400	250	1.1	19	7.0	90	5.2
500	280	1.35	22	5.5	91	6.9
630	450	1.5	21	5.5	91	7.8
800	550	2.0	35	5.0	92	10.1
1000	650	2.6	45	4.3	93	13.6
1600	1050	4.1	80	3.3	95	16.7
2500	1450	6.2	100	2.7	95	24.0

Dimensions [mm]					
a	b	c	e	f	g ¹
120	93	120	90	73	5.8
120	104	120	90	85	5.8
120	124	120	90	106	5.8
150	122	155	122	90	7.0
150	140	155	122	106	7.0
150	165	155	122	134	7.0
174	160	170	135	121	7.0
192	185	190	170	140	8.5

Ordering data						
Nominal power	Part no.	230 V $\pm 5\%$	400 V $\pm 5\%$	420 / 440 / 500 V $\pm 5\%$	230 V $\pm 5\%$	400 V $\pm 5\%$
[VA]	U	230 V	230 V	230 V	24 V	24 V
320	U 200-	75.00	76.00	77.00	78.00	79.00
400	U 250-	75.00	76.00	77.00	78.00	79.00
500	U 280-	75.00	76.00	77.00	78.00	79.00
630	U 450-	75.00	76.00	77.00	78.00	79.00
800	U 550-	75.00	76.00	77.00	78.00	79.00
1000	U 650-	75.00	76.00	77.00	78.00	79.00
1600	U 1050-	75.20	76.20	77.20	78.20	79.20
2500	U 1450-	75.20	76.20	77.20	78.20	79.20

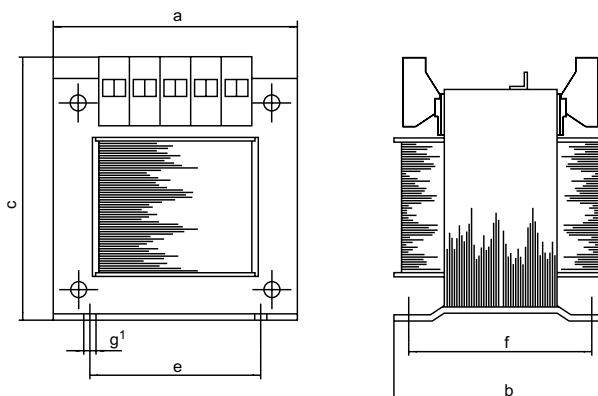

Special feature at extra charge

- With UL/CSA approval available, see series FTUL, page 9 (FTUL 24-1451)