



# Ty-Fast®


All-plastic ties

Special push-mount ties

## Approvals



E49405

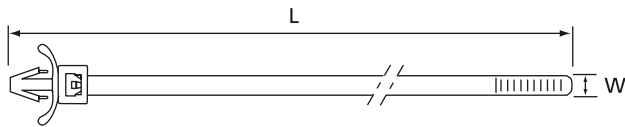

## Ordering Information

PRODUCT REF.	COLOUR	LENGTH L [mm]	WIDTH W [mm]	BUNDLE DIAMETER MAX. [mm]	MINIMUM TENSILE STRENGTH [N]	QUANTITY [pieces]	TOOLING
L-5-50PM-0-C	UV-resistant black	147	4.8	25	220	100	ERG297, ERG299
L-5-50PM-9-D	natural	147	4.8	25	220	1000	TR227
L-7-50PM-0-C	UV-resistant black	208	4.8	44	220	100	WT193A
L-7-50PM-9-C	natural	208	4.8	44	220	100	L-500-EU


For use in 6.35 mm mounting hole. Maximum panel thickness 2.7 mm  
For tooling specifications see pages 92 to 99

## All-plastic ties

Special cable ties: releasable push-mount ties

## Technical Information

Material	Polyamide 6.6
Temperature range	-40°C to +85°C
Colour	Natural or UV-resistant black (see table)
Flammability rating	UL 94 V-2
Other properties	UV-resistant (black) Halogen free, Silicone free

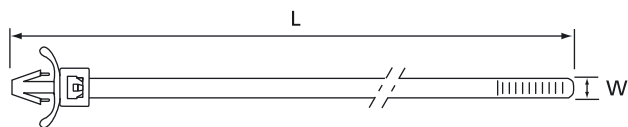

## Ordering Information

PRODUCT REF.	COLOUR	LENGTH L [mm]	WIDTH W [mm]	BUNDLE DIAMETER MAX. [mm]	MINIMUM TENSILE STRENGTH [N]	QUANTITY [pieces]	TOOLING
TB-4-50PMR-9-C*	natural	99	4.8	20	220	100	WT1-TB, WT2-TB
L-5-50PMR-0-C	UV-resistant black	147	4.8	25	220	100	ERG297, ERG299
L-5-50PMR-9-C	natural	147	4.8	25	220	100	TR227
L-7-50PMR-0-C	UV-resistant black	208	4.8	44	220	100	WT193A
L-7-50PMR-9-C	natural	208	4.8	44	220	100	L-500-EU

\* not UL approved

For use in 6.35 mm mounting hole. Maximum panel thickness 2.7 mm  
For tooling specifications see pages 92 to 99



## Technical Information

Material	Polyamide 6.6
Temperature range	-40°C to +85°C
Colour	Natural or UV-resistant black (see table)
Flammability rating	UL 94 V-2
Other properties	UV-resistant (black) Halogen free, Silicone free



## Approvals



E49405