



L-4-18ID-9-C

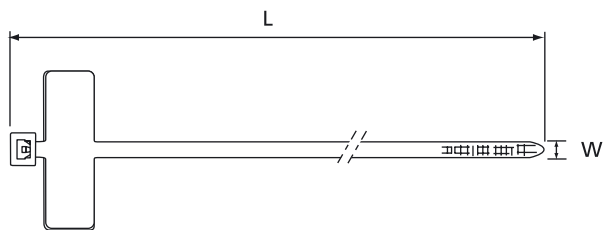

L-7-50ID-9-C



Technical Information

Material	Polyamide 6.6
Temperature range	-40°C to +85°C
Colour	Natural
Flammability rating	UL 94 V-2
Other properties	Halogen free, Silicone free

Ordering Information

PRODUCT REF.	LENGTH L [mm]	WIDTH W [mm]	LABEL DIMENSIONS [mm]	BUNDLE DIAMETER MAX. [mm]	MINIMUM TENSILE STRENGTH [N]	QUANTITY [pieces]	TOOLING
L-4-18ID-9-C	102	2.5	7.9 x 24.7	19	80	100	ERG299
L-4-18ID-9-M	102	2.5	7.9 x 24.7	19	80	1000	TR227, WT193A
L-7-50ID-9-C	200	4.7	30 x 13.3	44	220	100	ERG297, ERG299
L-7-50ID-9-M	200	4.7	30 x 13.3	44	220	1000	TR227, WT193A L-500-EU

For tooling specifications see pages 92 to 99