

Special ties with steel locking barb

Cable ties with identification tag



Characteristics

- Identification ties with incorporated label for durable marking and tying
- Label forms onto the bundle for types TY512M, TY51M and protrudes for ties TY532M and TY53M
- Series 51M is MIL (MS-3368-5) approved
- Trouble-free installation
- All edges are rounded to make installation easier
- Available in bulk packaging (500/1000 pieces) or in small packaging (100 pieces)

Technical information

- Material - Molding: Polyamide 6.6
- Material - Locking barb: 316 grade stainless steel
- Temperature range: -40°C to +85°C
- Color: Natural
- Flammability rating: UL 94 V-2
- Other properties: Halogen free, Silicone free



Cable ties with identification tag

Product code	GID No.	Bundle ø from ... to [mm]	Length L [mm]	Width W [mm]	Thickness [mm]	Min. tensile strength [N]	Label dimensions [mm]	Quantity [pieces]
Standard pack size								
TY551M	7TAG009510R0065	10 - 16	92	2,4	1,0	80	25,4 x 7,9	100
TY5512M	7TAG009510R0064	10 - 51	210	2,4	1,0	80	25,4 x 7,9	100
TY553M	7TAG009510R0069	2 - 16	102	2,4	1,0	80	20,6 x 9,3	100
TY5532M	7TAG009510R0067	2 - 51	212	2,4	1,0	80	20,6 x 9,3	100
Bulk pack size								
TY51M*	7TAG009510R0046	10 - 16	92	2,4	1,0	80	25,4 x 7,9	500
TY512M*	7TAG009510R0044	10 - 51	210	2,4	1,0	80	25,4 x 7,9	1000
TY53M	7TAG009510R0052	2 - 16	102	2,4	1,0	80	20,6 x 9,3	500
TY532M	7TAG009510R0050	2 - 51	212	2,4	1,0	80	20,6 x 9,3	1000

*TY51M and TY512M are UL listed.

For other materials and colors contact your Sales Office.

Description of product code structure: see page 13.

Description of materials and properties: see pages 144 to 159.

For tooling specifications: see pages 136 to 143.

Tooling




ERG50

For use with 2,4 mm to 4,8 mm (80N to 220N) cable ties. See page 136.

Dimensions

TY53M, TY553M, TY532M, TY5532M

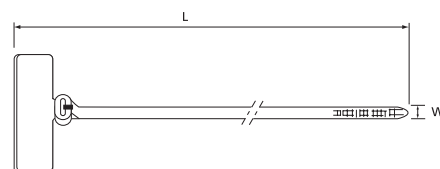

TY51M, TY551M, TY512M, TY5512M

