

Special ties with steel locking barb

Cable ties with identification tag



Characteristics

- Identification ties with incorporated label for durable marking and tying
- Label forms onto the bundle
- 5 different versions, up to 4 straps, in bulk and small packaging
- 4 versions (up to 3 straps) are Mil-specified
- Trouble free installation
- Labelling of bundles up to 102mm diameter
- All edges are rounded and surfaces smoothed to make installation easier

Technical information

- Material - Molding: Polyamide 6.6
- Material - Locking barb: 316 grade stainless steel
- Temperature range: -40°C to +85°C
- Color: Natural
- Approvals: MIL: MS-3368 -1, -2, -3, -4
- Flammability rating: UL 94 V-2
- Other properties: Halogen free, Silicone free



Cable ties with identification tag

Product code	GID No.	Bundle ø from ... to [mm]	Length L [mm]	Width W [mm]	Thickness [mm]	Min. tensile strength [N]	Label dimensions [mm]	Quantity [pieces]
Standard pack size								
TY548M	7TAG009510R0063	19 - 102	360	4,8	1,1	220	13,1 x 57,2	100
TY546M	7TAG009510R0058	9,5 - 45	184	4,8	1,1	220	13,1 x 27,0	100
TY546MD	7TAG009510R0059	9,5 - 45	184	4,8	1,1	220 x 2	29,7 x 27,0	50
TY546MT	7TAG009510R0061	9,5 - 45	184	4,8	1,1	220 x 3	46,0 x 27,0	100
TY546MF	7TAG009510R0060	9,5 - 45	184	4,8	1,1	220 x 4	63,1 x 27,0	50
Bulk pack size								
TY48M*	7TAG009510R0039	19 - 102	360	4,8	1,1	220	13,1 x 57,2	1000
TY46M*	7TAG009510R0018	9,5 - 45	184	4,8	1,1	220	13,1 x 27,0	1000
TY46MD	7TAG009510R0025	9,5 - 45	184	4,8	1,1	220 x 2	29,7 x 27,0	500
TY46MT	7TAG009510R0033	9,5 - 45	184	4,8	1,1	220 x 3	46,0 x 27,0	500
TY46MF	7TAG009510R0031	9,5 - 45	184	4,8	1,1	220 x 4	63,1 x 27,0	250

* TY46M and TY48M are cURus certified.

For other materials and colors contact your Sales Office.

Description of product code structure: see page 13.

Description of materials and properties: see pages 144 to 159.

For tooling specifications: see pages 136 to 143.

Tooling



ERG50

For use with 2,4mm up to 4,8 mm (80N to 220N) cable ties. See page 136.




ERG120

For use with 4,8mm up to 7,6 mm (220N to 540N) cable ties. See page 136.

Dimensions


TY48M




TY46M



TY46MD



TY46MT

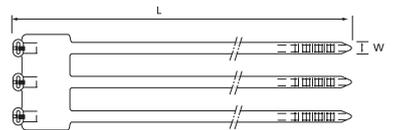

TY46MF

