
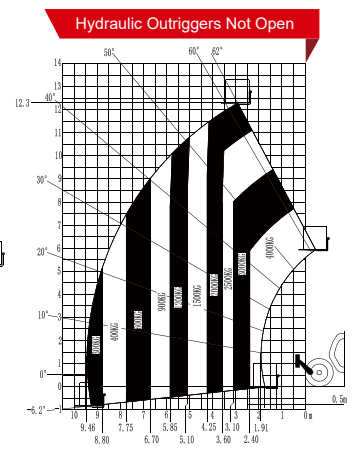
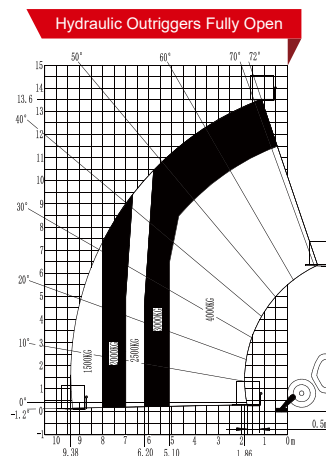



# LGMG TELEHANDLERS

## SPECIFICATIONS

MODELS	H1440
Measurements	Metric
<b>A</b> Max. Lifting Height	13.6m
Max. Outreach	9.22m
<b>B</b> Overall Length	6.08m
<b>C</b> Overall Width	2.44m
<b>D</b> Overall Height	2.68m
<b>E</b> Wheelbase	3.07m
<b>F</b> Wheel Track	1.96m
Ground Clearance	0.41m
PRODUCTIVITY	
Max. Capacity	4000kg
Gradeability-Unladen	65%
Min. Turning Radius	4.2m
Tilt Angle	±9°
Drive /Steering Mode	4 Wheel Drive / 4 Wheel Steer
Primary Boom Ascending Time	7.5-17.5s
Primary Boom DescendingTime	13.5-23.5s
Boom Extending Time	12.5-22.5s
Boom Retracting Time	8-18s
Forward - First Gear Travel Speed	5km/h
Forward - Second Gear Travel Speed	12km/h
Forward - Third Gear Travel Speed	20km/h
Forward - Fourth Gear Travel Speed	30km/h
Backward - First Gear Travel Speed	5km/h
Backward - Second Gear Travel Speed	12km/h
Backward - Third Gear Travel Speed	20km/h
Max. Braking Distance-Unladen	≤5.5m (20km/h)
Standard Tyres	440/80R24
POWER	
Manufacturer	Perkins
Rated Power	74.5kw
Max. Torque	430N.m
Displacement	3620ml
TANK CAPACITIES	
Hydraulic Oil Capacity	180L
Fuel Tank Capacity	150L
WEIGHT	
Machine Weight	12050kg

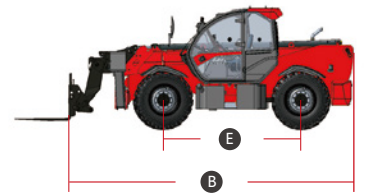

Please contact LGMG or a local dealer for more details.

LGMG reserves the right to change technical data without prior notice. All photos and pictures in this brochure are for promotional purposes only.

### LINGONG HEAVY MACHINERY CO., LTD.

Address: No. 2676, Kejia Road, Jinan, Shandong, China  
 Email: sales@lmg.com.cn Tel: +86 531 6787 9283

### LGMG Europe B.V.

Address: Donker Duyvisweg 301, 3316 BL Dordrecht, The Netherlands  
 Email: sales@lmg-europe.com Tel: +31 850 642 777

### LGMG North America Inc.

Address: 4105 Live Oak Drive, Suite 100, The Colony, Texas 75056 United States  
 Email: sales@lmg-na.com Tel: +1 833 288 5464

www.lmg-lifts.com

**LGMG**  
 RELIABILITY IN ACTION