


## Vapor Recovery Composite Hose Type 466

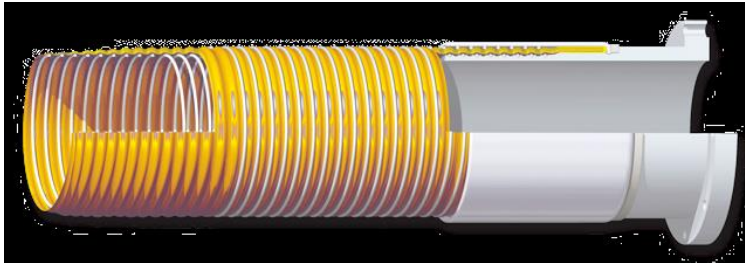

### Applications

This type is recommended for use with vapor recovery systems in tank truck, bottom loading and ship to shore applications. For chemicals as well for hydrocarbon vapor. A stainless steel outer wire is available for applications which include a corrosive environment.

### Technical description

Lining : Polypropylene

Inner Wire : Polypropylene coated Steel

Outer Wire : PGP466 Galvanized Steel

PSP466 Stainless Steel 304 or 316

Cover : PVC coated Nylon, Yellow

Temperature range : -30°C to + 80°C (122F to + 176F)

Electrical properties : Electrically conductive

According Standard : EN13765:2010, Type 1

Complies with : IMO IBC code

### Physical properties

Maximum elongation : 10% on test pressure

Vacuum range : 0,5 bar

### End Fittings

Specially designed end fittings have been developed for use of these Composite hoses, including threaded ends, flanged ends and other connections. By means of a hydraulic operated press, a ferrule is externally swaged onto the hose to secure the hose shank and guarantee a leak proof connection between hose and fitting. All ferrules are welded to the end fitting before swaging for even safer operating conditions.

TECHNICAL DATA: TYPE PGP466/ PSP466									
Inside Diameter		Working Pressure		Min. Bend Radius		Approx Weight		Maximum Length	
Inches	mm	PSI	Bar	Inches	mm	lb/ft	kg/m	Feet	Meters
2	50	100	7	5	125	1.00	1.50	65	20
3	75	100	7	7	175	1.75	2.60	65	20
4	102	100	7	11	275	2.55	3.80	65	20
5	125	100	7	14	360	3.05	4.50	65	20
6	150	100	7	16	410	3.60	5.30	79	24
8	200	100	7	22	560	8.05	11.90	65	20
10	250	100	7	30	760	10.35	15.30	50	15

Pressure based on safety factor 5:1

All information in this document is without any obligation, dimensions and weight are approximate only and the specifications are subject to change without any notice.