




**Pan-Ty® Cable Ties – TEFZEL® – Distinctive Aqua Blue Color**

- Ideal for applications requiring resistance to environmental stresses such as chemical attack, gamma radiation, ultraviolet radiation and extreme high and low temperatures
- Ideal for use in nuclear power facilities and chemical processing plants and meets the requirements of IEEE 383
- Low smoke density and excellent flammability rating of UL 94V-0
- One-piece construction for consistent performance and reliability
- Among the lowest threading force of any one-piece cable tie in the industry
- Curved tip is easy to pick up from flat surfaces and allows faster initial threading to speed installation
- For indoor or outdoor use

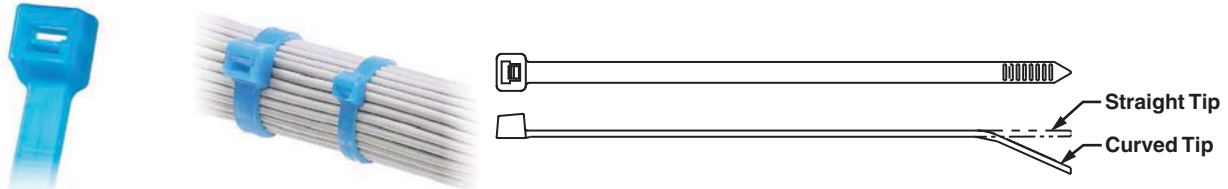


Part Number	Length		Width		Thickness		Max. Bundle Dia.		Min. Loop Tensile Str.		Recommended Installation Tool	Std. Pkg. Qty.	Std. Ctn. Qty.
	In.	mm	In.	mm	In.	mm	In.	mm	Lbs.	N			
<b>Miniature Cross Section</b>													
PLT1M-C76	4.0	102	0.098	2.5	0.043	1.1	.87	22	18	80	GTS-E, GS2B-E, PTS, PPTS, STS2	100	1000
<b>Intermediate Cross Section</b>													
PLT2I-C76	8.0	203	0.135	3.4	0.045	1.1	2.00	51	30	133	GTS-E, GS2B-E, PTS, PPTS, STS2	100	1000
<b>Standard Cross Section</b>													
PLT2S-C76	7.4	188	0.190	4.8	0.055	1.4	1.88	48	50	222	GTS-E, GS2B-E, GTH-E, GS4H-E, PTS, PTH, PPTS, STS2, STH2	100	1000
PLT3S-C76	11.6	295	0.190	4.8	0.059	1.5	3.00	76					
PLT4S-C76	14.6	371	0.190	4.8	0.059	1.5	4.00	102					
<b>Light-Heavy Cross Section (Straight Tip)</b>													
PLT3H-L76	11.5	292	0.300	7.6	0.075	1.9	3.00	78	120	534	GTH-E, GS4H-E, GS4EH-E, PTH, STH2, ST3EH	50	500
PLT4H-L76	14.6	371	0.300	7.6	0.075	1.9	4.00	102					

■ TEFZEL is a registered trademark of The Chemours Company.



**Cable Tie Mounts – TEFZEL®**

- Flammability rating of UL 94V-0 – indoor use
- Unique cradle design provides maximum stability for the cable bundle
- Low profile design keeps bundle close to mounting surface



Part Number	Used with Cable Ties*	Length A		Width B		Height C		Counterbore Diameter		Mounting Method	Std. Pkg. Qty.	Std. Ctn. Qty.
		In.	mm	In.	mm	In.	mm	In.	mm			
TM2S8-C76	M, I, S	0.63	16.0	0.43	10.8	0.28	7.0	0.30	7.6	#8 (M4) screw	100	500
TM3S8-C76	S, LH	0.86	21.7	0.62	15.5	0.38	9.5	0.37	9.4	#8 (M4) screw		
TM3S10-C76	S, LH	0.86	21.7	0.62	15.8	0.38	9.5	0.37	9.4	#10 (M5) screw		

\*Cable tie cross section sizes: M = Miniature, I = Intermediate, S = Standard, LH = Light-Heavy.

■ TEFZEL is a registered trademark of The Chemours Company.